

**Limited
Lifetime
Warranty**

TITAN PROTECTIVE HOUSEWRAP

AIR BARRIER & CERTIFIED DRAINAGE MATERIAL

- Certified Air Barrier Material which exceeds ASTM E-2178 requirements.
- Certified drainage material, exceeds ASTM E-2773 performance requirement.
 - High perm, exceeds ASTM 96A.
 - Water resistant barrier meets AC 38 criteria.
- Greater tear resistance & strength versus competitive products.
 - Class A Flame Spread Rating: ASTM E-84
 - CCMC 14071-R, CCMC 14099 R




NON WOVEN

NON PERFORATED

TITAN PROTECTIVE HOUSEWRAP

- Premium tear strength
- 3 Ply construction for extreme jobsite durability
- Quick & simple installation
- Outstanding nail tear resistance
- Ensures less callbacks for installers and peace of mind knowing that the building envelope is protected
- Excellent tape adhesion
- Breathable membrane is protected on both sides for added durability

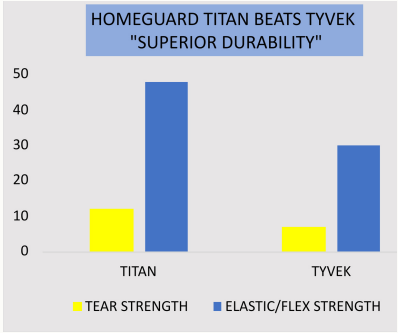

HOMEGUARD BRAND HOUSEWRAPS: MARKET COMPARISON

FEATURE	PRODUCT / BRAND		HOMEGUARD HOUSEWRAP	HOMEGUARD TITAN PROTECTIVE HOUSEWRAP	TYVEK HOMEWRAP	TYPAR HOUSEWRAP	DRYLINE HP	NOVAWRAP ASPIRE
	TEST METHOD / DESCRIPTION	STANDARD SPECIFICATIONS ICC - AC38						
CERTIFIED AIR BARRIER MATERIAL	ASTM E-2178-03 AIR BARRIER MATERIAL	< 0.02 L / s / m ²	N/A	< 0.001	< 0.004	0.001	< 0.01	< 0.0014
DRAINAGE PLANE CHANNEL BULK H ₂ O FLOW	ASTM E-2273 DRAINAGE PLANE (%)	ICC-ES AC24 SECTION 6.11 (90% minimum)	PASS 93%	PASS 93%	NOT RECOMMENDED	NOT RECOMMENDED	NOT RECOMMENDED	PASS (98%)
DURABILITY RESISTANCE TO TEAR & RIP UNDER WIND AND JOBSITE CONDITIONS	ASTM D-1117 TRAP TEAR (MD/CD)	RESISTANCE TO TEARING (ZIPPER)	30 LBS / 30 LBS	12 LBS / 10 LBS	7 LBS / 9 LBS	30 LBS / 33 LBS	7 LBS / 10 LBS	20 LBS / 15 LBS
	ASTM D-882 MD/CD TENSILE STRENGTH (LBS)	> 20 LBS EACH MD/CD	54 LBS / 36 LBS	48 LBS / 39 LBS	30 LBS / 30 LBS	80 LBS / 87 LBS (5034)	65 LBS / 45 LBS (5034)	50 LBS / 40 LBS (5034)
VAPOR PERMEABLE ALLOWS MOISTURE VAPOR TO ESCAPE	WVTR ASTM E-96A	> 35 g / m ² / 24 hrs (5 PERMS)	15 PERMS	59 PERMS	56 PERMS / 54 PERMS	11.7 PERMS	60 PERMS	11 PERMS
BASIS WEIGHT	TAPPI T-410 BASIS WEIGHT (oz/yd ²)	WEIGHT OF FABRIC (g / m ²)	65	98	60	96	80	98
WATER RESISTANCE PROTECTION AGAINST H ₂ O INTRUSION	AATCC-127 WATER RESISTANCE (55 cm for 5 hours)	55 cm H ₂ O > 5 Hours (peak resistance)	PASS (> 200cm)	PASS (> 200cm)	PASS (> 220cm)	PASS (>850cm)	> 60 MINUTES (ASTM D-779)	PASS (390 cm)
UV RESISTANCE	Testing After Aging	Recommended Limits	180 Days	180 Days	120 Days	180 Days	180 Days	180 days
FLAME RESISTANCE	ASTM E-84 FLAME SPREAD	CLASS A	CLASS A	CLASS A	CLASS A	CLASS A	CLASS A	CLASS A

***TYPAR PUBLISHED PERFORMANCE SPECIFICATIONS. TYPAR® IS A REGISTERED TRADEMARK OF BERRY PLASTICS.
***DRYLINE PUBLISHED PERFORMANCE SPECIFICATION.
***NOVAWRAP ASPIRE PUBLISHED PERFORMANCE SPECIFICATIONS.
***TYVEK PUBLISHED PERFORMANCE SPECIFICATIONS.

LIMITED LIFETIME WARRANTY

COMBINING TITAN PROTECTIVE HOUSEWRAP WITH OUR HOMEGUARD SYNTHETIC FLASHING, WE CREATE AN ENERGY EFFICIENT WEATHER BARRIER SYSTEM BACKED BY A LIMITED LIFETIME WARRANTY.

HOMEGUARD SYNTHETIC FLASHING IS A HIGH PERFORMING SELF-ADHERED WINDOW AND DOOR FLASHING TAPE, DESIGNED WITH AN APPLICATOR TEMPERATURE RANGING FROM -29 DEGREES FAHRENHEIT TO EXTREME HEAT. IT IS COMPATIBLE WITH ALL SEALANTS AND CAULKING.

HOMEGUARD TITAN WRAP ROLLS SIZE AND MINIMUM ORDER QUANTITIES

3'X100' - 180 ROLLS	4.5'X100' -120 ROLLS
3'X100' - 150 ROLLS	4.5'X150' -100 ROLLS
3'X195' - 120 ROLLS	4.5'X195' - 80 ROLLS
9'X100' - 60 ROLLS	10'X100' - 60 ROLLS
9'X150' - 50 ROLLS	10'X100' - 50 ROLLS
9'X195' - 40 ROLLS	10'X100' - 40 ROLLS



EPAK

55 PLYMOUTH STREET
WINNIPEG, MANITOBA
R2X 2V5
1-800-665-8083
204-947-1383

WWW.HOUSEWRAP.CA