

TOUGHSKIN[®] 20


WITH SLIPSAFE[®] TECHNOLOGY



ENJOY FEWER BLOW-OFF'S, REPAIRS AND CALLBACKS WITH TOUGHSKIN[®] ROOFING UNDERLAYMENT.

HomeGuard[®] ToughSkin[®] 20 is an engineered, mechanically attached synthetic underlayment. Designed to meet the needs of today's roofers.

HomeGuard[®] ToughSkin's high-strength design is 25x stronger than 15lbs. Saturated Felt and 5x lighter than 30lbs. With each roll having 10 squares of coverage (4'x250'), installations will be faster, and more efficient - with fewer laps, cuts and less handling when compared to felt.

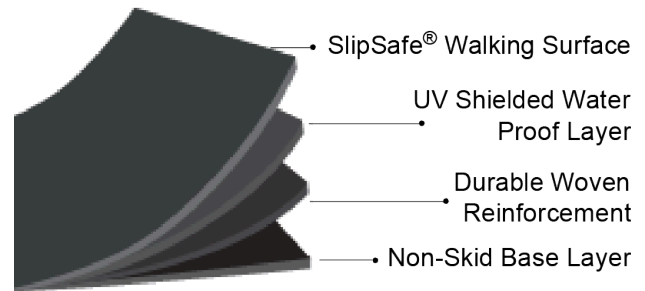

Roll Size:	1000 sqft
Roll Dimensions:	4' x 250'
Weight Per Roll:	21 lbs. / Roll
UV Exposure Limit:	6 Months (Maximum)
Tensile Strength: ASTM D1970	MD=87 CD=59
Tear Strength: ASTM D5733	MD=35 CD=38


Exceeds AC188 Standards.
SlipSafe[®] Walking Surface.
Engineered Backside Non-Slip Coating.
25x Stronger than 15lbs Felt.
Installs with ease.
No Oil Leaching - No Hazardous Material Content.
Class A Fire - ATSM E108 (as part of a system).
Low Temperature Flexibility.



SLIPSAFE[®] SURFACE



ECOFRIENDLY



ENHANCED UV EXPOSURE

LIMITED LIFETIME WARRANTY

CONTACT US



55 Plymouth Street
Winnipeg, MB
R2X 2V5



1-800-665-8083



www.homeguardhousewrap.ca