

TOUGHSKIN® 20

WITH SLIPSAFE® TECHNOLOGY

HOMEGUARD TOUGHSKIN® IS AN ENGINEERED, MECHANICALLY ATTACHED SYNTHETIC UNDERLAYMENT FOR SLOPED ROOFS. THIS IS DESIGNED TO MEET THE NEEDS OF TODAY'S ROOFERS.

TOUGHSKIN'S NONSKID BASE COATING ALLOWS THE UNDERLAYMENT TO STAY IN PLACE PRIOR TO APPLYING FASTENERS. THE SLIPSAFE TECHNOLOGY GIVES A HIGH-TRACTION WALKING SURFACE, ALONG WITH EXCELLENT DURABILITY. THIS MAKES IT THE SMART CHOICE FOR TODAY'S ROOFING PROFESSIONALS.

TOUGHSKIN® MEETS ALL CODE REQUIREMENTS INCLUDING ASTM D226, ASTM E-106, CSA A220, CSA A123, CERTIFIED INTERTEK CCRR-1069, AND IS MIAMI-DADE COMPLIANT.

ASK FOR IT AT YOUR NEAREST ROOFING DISTRIBUTOR TODAY!!!!

ToughSkin 20


ROLL SIZE	1000 ft ²
ROLL DIMENSIONS	48"X 250'
WEIGHT PER ROLL	21lbs / Roll
UV EXPOSURE LIMIT	6 Months (Maximum)
TENSILE STRENGTH: ASTM D1970	MD = 87 CD = 59
TEAR STRENGTH ASTM D5733	MD = 35 CD = 38



ENHANCED UV EXPOSURE



SLIP SAFE SURFACE



**33% MORE
COVERAGE PER LAP**



ECOFRIENDLY

ToughSkin 20 Market Comparison

Feature Product

Length Of Roll

Width Of Roll

Weight of Roll

Rolls per Pallet

UV Exposure Limit

Warranty

Toughskin 20

250' (76.2m)

48" (1.22m)

21 Lbs. per roll

64

180 Days

Limited Lifetime

Rhino U20

286' (87m)

42" (1.1m)

23.5 Lbs. per roll

67

90 Days

20 Years

FT Syn Silver

250' (76.2m)

48" (1.2m)


22 Lbs. per Roll

49

90 Days

30 Years

- Code Approved - Meets AC188.
- Slip safe walking surface.
- Engineered Backside non-slip coating.
- Enhanced UV - 180 days exposure.
- 25x stronger than 15lb felt.
- Installs with ease.
- No oil leaching - no hazardous material content.
- Class A Fire - ASTM E108 (as part of a system).
- Low temperature flexibility.

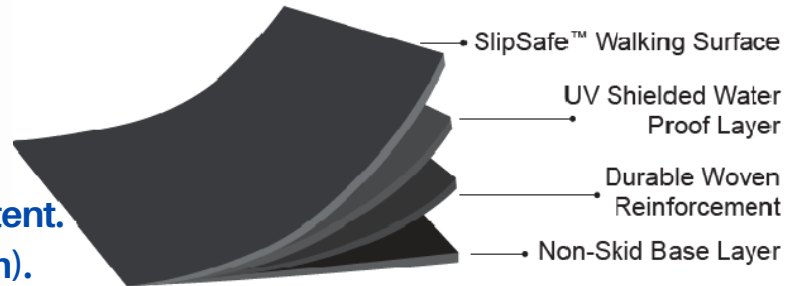

EPAK

55 PLYMOUTH STREET
WINNIPEG, MB
R2X 2V5
1-800-665-8083
204-947-1383

WWW.EPAK.CA